

9



9 Connect all cables, mount the aftermarket car-radio + brackets to the brackets previously fitted inside the housing using the four screw supplied.

Fix the radio-frame.

This is the result after the installation.

Facia plate installation kit for:


FIAT

Model: Ducato III 250/251 2006 – 2011;
Ducato III 250/251 2011 – 2014;
Ducato III 250/251 from 2014;
Citroën Jumper II 250/250D/250L from 2006;
Peugeot Boxer II 250/251 from 2006;

Kit content: double DIN facia plate
mounting brackets + screws

Compatibility: Compatible with double DIN device

Customer code:

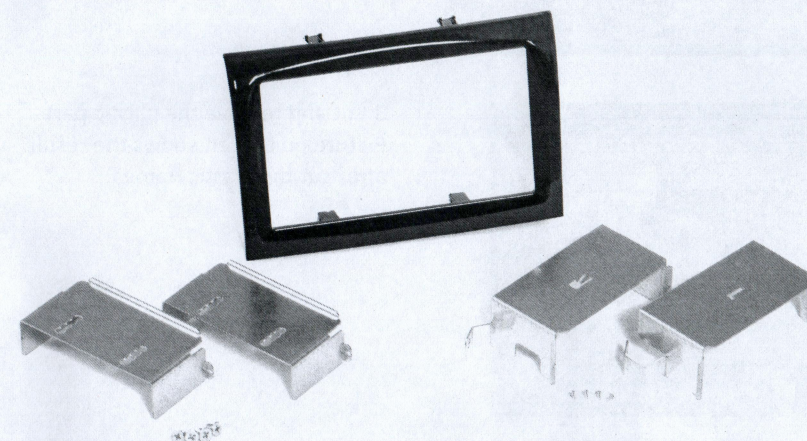

INSTALLATION MANUAL


All installation work must be performed by a qualified professional installer only.
The manufacturer / dealer is not liable for any kind of incidental or indirect damages.




1 This is how the original dashboard looks like.




2 Remove the original plastic or the original car radio.

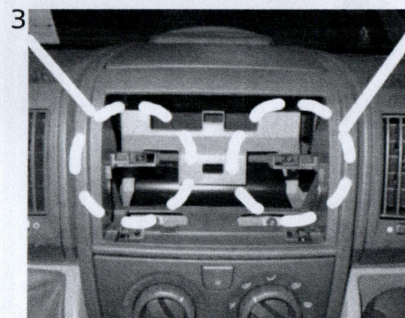


3 Cut and remove the plastic parts. Picture on the left shows the result after cut the plastic frames.

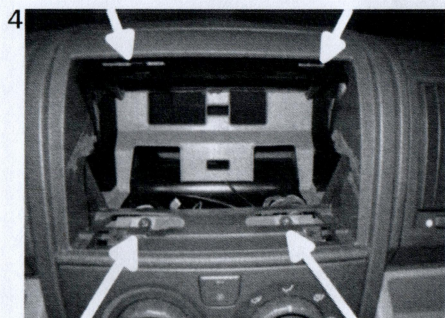


4 Remove the four screws as shown.

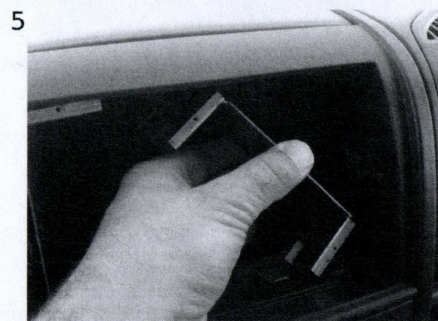


5 Put the mounting brackets inside the radio housing.

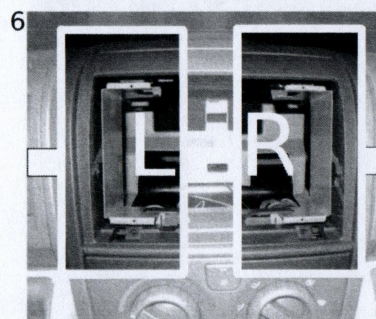

6 These are the brackets mounted inside the radio housing. Pay attention to the letters on the brackets.

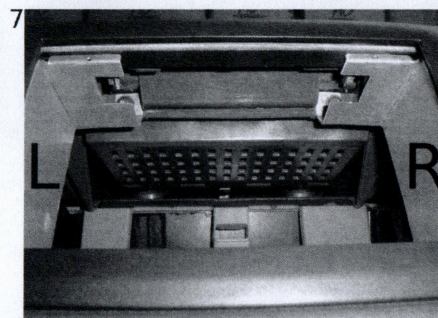

7 Screw them using a magnetic screwdriver.

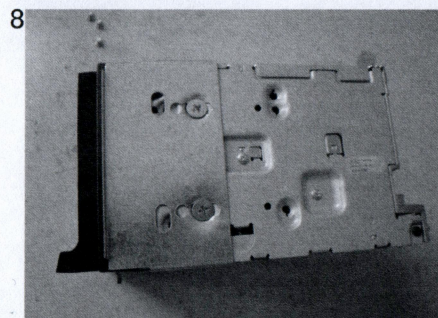

8 Screw the aftermarket car-radio to the remaining two brackets paying attention to fix it to the right holes of the brackets: tighten screws until the aluminium gets slightly deformed.